



WHEEL LOADER  
**ER420T**

 Rated Load | 2000kg

 Rated Power | 53kW

 Net Weight | 5500kg

**ER420T**




 Tel: +27(0)21 380 2580


 Website: [www.everun.co.za](http://www.everun.co.za)

 Address: 2 Alkin Park, 4 Montreal Drive,  
Airport Industria,  
Cape Town, 7490

 Tel: +27(0)82 058 4434

 Facebook: @Sales.Everun

 Email: [sales@everun.co.za](mailto:sales@everun.co.za)

 Instagram: everun.africa



# ER420T | WHEEL LOADER



• Everun articulated oscillating floating joint



• Standard wider 16/70-20 tubeless tires



• Bigger and stronger lifting cylinders



• Streamline designed engine hood & iron Casting rear bumper



• Easily accessible lubrication points



• Short hydraulic hose lengths




• ROPS & FOPS cabin with maintenance port



• Vibration-damped working area



• Ergonomic joystick

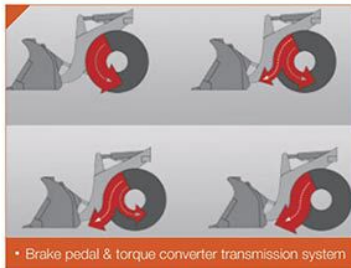

• Brake pedal & torque converter transmission system



• Large selection of attachments



• Large selection of tyres

Everun ER420T Wheel Loader with real CE certificate which is issued by TÜV Rheinland. New Rops & Fops cabin and new floating oscillating articulation guarantee a safer operation. With 2ton loading capacity and different attachments, not only have superior performance in agricultural and garden application, but also advanced for small constructions and terrain field application. It is the quick and easy solution to all of your day job.

## Specifications

### Engine Details

Model	Xichai 4DX21-72 Engine
Engine Type	In-line Arrangement, Water-cooled, Four-cycle Diesel Engine
Rated Power	53kW
Rated Speed	2400 r/min(rpm)
Fuel Consumption Ratio In Standard Working Condition	230g/kW.h

### Bucket

Bucket Capacity	0.67m <sup>3</sup>
Bucket Width	2040mm
Bucket Type	Heavy-duty Bolt On Teeth
Rated Load	2000kg

### Transmission System

Type	Fixed-spindle Power Shift
Shift Gear Control Oil Pressure	1.2-1.5 MPa
Rated Input Speed	2500(rpm)

### Brake System

Service Brake	Four Wheel Hydraulic Spread-shoed Brake
Parking Brake	Hand Operated

### Operating Specifications

Steering System	Articulated Frame With Hydraulic Power Steering
Minimum Turning Radius	5460mm
Driving System	Hydraulic Converter
Net Weight	5500kg

### Overall Dimensions

Overall Length (bucket on ground)	5710mm
Overall Height	2800mm
Overall Width	2040mm

### Tyre

Type Specification	16/70-20
--------------------	----------