

# ER2500T



Telescopic Wheel Loader

-  Operating Weight **5600kg**
-  Rated Power **55kW**
-  Max. lifting Height **4500mm**
-  Overall Dimension (L\*H\*W) **4500\*2720\*1870mm**



Tel: +27(0)21 380 2580

Website: [www.everun.co.za](http://www.everun.co.za)

Address: 2 Alkin Park, 4 Montreal Drive,  
Airport Industria,  
Cape Town, 7490

Tel: +27(0)82 058 4434

Facebook: @Sales.Everun

Email: [sales@everun.co.za](mailto:sales@everun.co.za)

Instagram: [everun.africa](https://www.instagram.com/everun.africa)

# ER2500T | Telescopic Wheel Loader



Everun articulated oscillating floating joint



Sturdy telescopic arm



Two stronger lift cylinder



Easy-to-open engine hood



Comfortable cabin and good visibility



Ergonomic joystick



Adjustable steering column



Quick and easy tool change




Good view of the freight



Easily accessible lubrication points



High shear forces from planetary axle

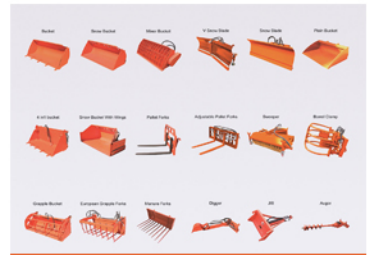

Large selection of attachments

## Specifications:

### ► Engine Details

Model	XICHAH 4DW21-72
Rated Power	55kW
Rated Speed	2400 (r/min)
Engine Cooling Way	Water Cooling
Fuel Consumption Ratio	≤230g/kw.h
Engine Type	In-line Arrangement, 4 Cycle Diesel Engine

### ► Standard Bucket

Bucket Capacity	1.2m <sup>3</sup>
Bucket Width	1800mm
Bucket Type	Heavy-duty Bolt on Teeth
Rated Load	2500kg

### ► Brake System

Service Brake	Four Wheel Disk Brake
Parking Brake	Hand Operated
Braking Type	Air Operated
Axle	Wheel Axle Reducer

### ► Tyre

Model	20.5-16, 12ply
Width	307mm
Diameter	831mm

### ► Overall Dimensions

Overall Length (Bucket on Ground)	4500mm
Overall Height	2720mm
Overall Width	1870mm

### ► Other

Max. Lifting Height	4500mm
Transmission System	Hydraulic Converter + Drive Shaft + Axles
Wheel Base	2430mm
Min. Turning Radius	5600mm
Wheel track	1470mm
Weight	5600kg
System Pressure	20Mpa
Hydraulic Output	96L/min
Max. Height to the Pin	4200mm